

JC02 Rec'd PCT/PTO 03 APR 2002

FORM PTO-1390 (REV. 12-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER 40012.066	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 CFR 1.5)	
				10/089870	
INTERNATIONAL APPLICATION NO. PCT/US00/27423		INTERNATIONAL FILING DATE October 4, 2000		PRIORITY DATE CLAIMED October 4, 1999	
TITLE OF INVENTION Methods of Identification and Verification					
APPLICANT(S) FOR DO/EO/US Bruce Kaiser, et al.					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</p> <p>4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))</p> <p>a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input type="checkbox"/> has been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</p> <p>6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p>a. <input type="checkbox"/> is attached hereto.</p> <p>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</p> <p>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p>a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input type="checkbox"/> have been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p>d. <input type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).</p> <p>9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p>Items 11 to 20 below concern document(s) or information included:</p> <p>11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.</p> <p>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>15. <input type="checkbox"/> A substitute specification.</p> <p>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</p> <p>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</p> <p>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</p> <p>20. <input type="checkbox"/> Other items or information:</p>					

FORM PTO-1390 (REV 12-2001) page 2 of 2

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application under 35 U.S.C. § 371:

Bruce KAISER et al.

Serial No.: Unassigned

Filed: Herewith

For: METHODS OF IDENTIFICATION AND
VERIFICATION

Priority Application:

PCT/US00/27423

Group Art Unit: Unassigned

Examiner: Unassigned

Commissioner for Patents
Washington, D.C. 20231

Sir:

PRELIMINARY AMENDMENT

Prior to a first Office Action on the merits, Applicants respectfully request entry of the following amendment.

IN THE CLAIMS

Please cancel all pending claims and add the following claims.

---18. A method for detecting a taggant in an article, comprising:

providing a taggant in a component of an article;

I hereby certify that this correspondence is being deposited with the United States Postal Service in an Express Mail Label envelope, label number EU221555425US, addressed to: Commissioner for Patents, Washington, D. C. 20231, on this 3rd Day of April, 2002.

Signed: Emily Foley

Dated: 4/2/02

causing the taggant to radiate an x-ray that penetrates through the component of the article; and

analyzing through that component whether the x-ray has a specific energy.

19. The method of claim 18, wherein the component comprises a yarn and the article comprises a carpet.

20. A method of making an article containing a taggant, comprising:

providing a component of the article; and

providing that component with a taggant that radiates an x-ray through that component when an energy beam is impinged on the taggant.

21. The method of claim 20, wherein the component comprises a yarn and the article comprises a carpet.

22. A method of tagging an article with a taggant comprising:

providing a component of the article; and

providing a taggant in that component of the article, the taggant radiating an x-ray through that component when an energy beam is impinged on the taggant.

23. The method of claim 22, wherein the component comprises a yarn and the article comprises a carpet.

24. An article containing a taggant made by the method comprising:

providing a component of the article; and

providing a taggant in the component of the article, the taggant radiating an x-ray through that component when an energy beam is impinged on the taggant.

25. The article of claim 24, wherein the component comprises a yarn and the article comprises a carpet.

26. An article comprising a taggant in a component thereof, the taggant radiating an x-ray through that component when an energy beam is impinged on the taggant.

27. The article of claim 26, wherein the component comprises a yarn and the article comprises a carpet.

28. A method for using an article containing a taggant, comprising:
providing an article with a taggant in a component thereof;
causing the taggant to radiate an x-ray that penetrates through the component of the article; and
analyzing through that component whether the x-ray has a specific energy.

29. The method of claim 28, wherein the component comprises a yarn and the article comprises a carpet.

30. The method of claim 18, wherein the yarn comprises a fiber containing the taggant.

31. The method of claim 20, wherein the yarn comprises a fiber containing the taggant.

32. The method of claim 22, wherein the yarn comprises a fiber containing the taggant.

33. The article of claim 24, wherein the yarn comprises a fiber containing the taggant.

34. The article of claim 26, wherein the yarn comprises a fiber containing the taggant.


35. The method of claim 28, wherein the yarn comprises a fiber containing the taggant.---

REMARKS

The claims have been amended as indicated above. Applicants await an action on the merits.

If there is any fee due in connection with the filing of this Amendment, including a fee for any extension of time not accounted for above, please charge the fee to our Deposit Account No. 18-0013.

Respectfully Submitted,

By 

KENNETH E. HORTON

Reg. No. 39,481

Date: April 2, 2002

8/pvls

1

Attorney Docket No. 02649.009

EXPRESS MAIL LABEL NO. EL 392 911 131 US
OCTOBER 4, 2000

5

METHODS FOR IDENTIFICATION AND VERIFICATION

REFERENCE TO RELATED APPLICATIONS

10 This application is a continuation-in-part application of U.S. Provisional Application Serial No. 60/157,573, the disclosure of which is incorporated herein by reference.

FIELD OF THE INVENTION

15 The present invention generally relates to apparatus and methods for identification and verification. More particularly, the present invention relates to apparatus and methods for detecting an element or compound intrinsically present—or extrinsically added—in an article or product by using X-ray fluorescence to identify and verify that article or product.

BACKGROUND OF THE INVENTION

20 There has been significant interest in apparatus and methods for identifying and verifying various articles or products such as explosives, ammunition, paint, petroleum products, and documents. Known methods used to identify and verify generally involve adding and detecting materials like code-bearing microparticles, bulk chemical substances, and radioactive substances. Other methods used for
25 identifying and verifying articles include those described in U.S. Patent Nos. 6,030,657, 6,024,200, 6,007,744, 6,005,915, 5,760,394, 5,474,937, 5,301,044, 5,208,630, 5,057,268, 4,862,143, 4,390,452, 4,363,965, and 4,045,676, the disclosures of which are incorporated herein by reference.

30 It is also known to apply materials to articles in order to track, for example, point of origin, authenticity, and their distribution. In one method, inks which are transparent in visible light are sometimes applied to materials and the presence (or

absence) of the ink is revealed by ultraviolet or infrared fluorescence. Other methods include implanting microscopic additives which can be detected optically. However, detecting these materials is primarily based on optical or photometric measurements.

Unfortunately, many of the apparatus and methods for identifying and
5 verifying articles using such materials (called taggants) are unsatisfactory for several reasons. First, they are often difficult and time-consuming. In many instances, a sample of the article must be sent to an off-site laboratory for analysis. In other instances, the apparatus are often expensive, large, and difficult to operate. In yet other instances, the taggant used is radioactive, causing serious health concerns.

10 The known apparatus and methods for identification and verification are also unsatisfactory because they require a "line-of-sight" analysis method. This line of sight requirement entails that the apparatus must be able to "see" the taggant in order to detect it. This can be detracting when it would be desirable to detect the taggant without having to see the taggant, e.g., such as when the taggant is located in the
15 middle of large package with packaging and labels "covering" the taggant.

SUMMARY OF THE INVENTION

The present invention provides an apparatus and method in which one or more taggants that are intrinsically located—or extrinsically placed—in an article or product are detected by x-ray fluorescence analysis to identify or verify the article or
20 its point of manufacture. The taggants are manufactured as part of the article or the taggant is placed into a coating, packaging, label, or otherwise embedded within the article for the purpose of later verifying the presence or absence of these elements by x-ray fluorescence to determine the unique elemental composition of the taggant within these articles.

25 By using x-ray fluorescence analysis, the apparatus and methods of the present invention are simple and easy to use, as well as provide detection by a non line-of-sight method to establish the origin of materials, point of manufacture, authenticity, verification, or product security. The present invention is extremely advantageous because it is difficult to replicate, simulate, alter, transpose, or tamper. Further, it is
30 easily recognizable by a user in either overt or covert form, verifiable by a

manufacturer or issuer, and is easily applicable to various forms of media in the articles.

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1, 2a, 2b, 3, 4a, 4b, and 5-8 are views of apparatus and methods for identification and verification according to the present invention. Figures 1, 2a, 2b, 3, 4a, 4b, and 5-8 presented in conjunction with this description are views of only particular—rather than complete—portions of apparatus and methods for identification and verification.

DETAILED DESCRIPTION OF THE INVENTION

The following description provides specific details in order to provide a thorough understanding of the present invention. The skilled artisan would understand, however, that the present invention can be practiced without employing these specific details. Indeed, the present invention can be practiced by modifying the illustrated apparatus and method and can be used in conjunction with apparatus and techniques conventionally used in the industry. For example, the present invention is described with respect to titanium oxide in carpet yarn fibers. But a skilled artisan could easily adapt the present invention for other materials which serve the same functions as titanium oxide in carpets. Indeed, the skilled artisan could easily adapt the present invention to be used with titanium oxide in articles other than carpets.

The present invention uses x-ray fluorescence analysis to detect at least one taggant which is intrinsically or extrinsically present in the material of a product or article. With x-ray fluorescence (XRF) analysis, x-rays produced from electron shifts in the inner shell(s) of atoms of the taggants and, therefore, are not affected by the form (chemical bonding) of the article being analyzed. The x-rays emitted from each element bear a specific and unique spectral signature, allowing one to determine whether that specific taggant is present in the product or article.

Figures 1, 2a, and 2b represent how it is believed XRF generally operates. In Figure 1, primary gamma rays or x-rays 40 are irradiated on a sample of a target

material 46 of article 42. Secondary x-rays 44 are emitted from that sample of target material 46.

In Figures 2a and 2b, atom 48 of a taggant located within target material 46 has nucleus 50 surrounded by electrons 52 at discrete distances from nucleus 50 (called electron shells). Each electron shell has a binding energy level equal to the amount of energy required to remove that electron from its corresponding shell. The innermost shell is the K shell, and has the highest binding energy level associated with it. Electron 54 is located within K shell 56.

Primary x-ray or gamma ray photon 40 impacting atom 48 has a given energy. If that energy is greater than the binding energy level of K shell 56, the energy of x-ray photon 40 is absorbed by atom 48, and one of the electrons in K shell 56 (i.e., electron 54) is ejected. With a vacancy now in K shell 56 left by electron 54, atom 48 is energetic and unstable. To become more stable, that vacancy in K shell 56 can be—and usually is—filled by an electron located in a shell with a lower binding energy level, such as L-shell electron 58 in L shell 60. As L-shell electron 58 fills the vacancy in K shell 56, atom 48 emits a secondary x-ray photon 44. The energy levels (or corresponding wavelengths) of such secondary x-ray photons are uniquely characteristic to each taggant, allowing the presence or absence of any specific taggant to be determined.

The at least one taggant can be intrinsically or extrinsically present in the product to be detected (the “target material”). When the taggant(s) is intrinsically present, it is a component (either as an element, compound, or other type of composition) in at least one portion of that target material. When the taggant(s) is extrinsically present, it can be added, incorporated, or inserted into the target material as described below.

The at least one taggant employed in the present invention can be any suitable taggant known in the art. See, for example, U.S. Patent Nos. 5,474,937, 5,760,394, and 6,025,200, the disclosures of which are incorporated herein by reference. Suitable taggants include any element or compound which is capable of being detected via XRF. The type of elements that can be used as the taggant are theoretically any of

those listed in the periodic table, but the lower energy emitted by electrons in the lower atomic-number elements could be a limiting factor. Such lower energies can be re-absorbed much easier into its own material matrix or, in some cases, into the ambient atmosphere (e.g, air). Further, different isotopes of an element, as well as elements which "excite" only under certain conditions—such as specific temperature ranges—could be employed as the taggant in the present invention. Example of taggants that could be used in the present invention include any element with an atomic number ranging from 6 to 94. Preferably, rare earth metals are used as the at least one taggant in the present invention. More preferably, titanium (Ti) is used as the at least one taggant in the present invention.

The type of taggant depends, among other things, on the target material in which it is located. The target material can interfere with the XRF detection because, as described below, backscattering and peaks emitted by the composition of the target material during XRF analysis can interfere with the taggant peaks. For example, if paper contained an As taggant and trace amounts of Pb existed in the paper, the K-level electrons of As and L-level electrons of Pb could give confusing readings during XRF detection.

In one aspect of the invention, the type of taggant should be selected based on the ability of the taggant and/or the substance in which it is located (i.e., a coating) to attach or bond to the target material. In many instances, the target material will be used, handled, and/or washed extensively. If the taggant (or the substance in which is located) is removed from the target material under such conditions, tagging the target material is of little value. For example, if a film or coating (e.g., ink) containing a taggant is applied to a target material (e.g., paper), the taggant and coating should be selected so that they will not be removed by the conditions to which the target material is periodically subjected (e.g., extensive contact with hands). Preferably, the coating and/or the taggant is selected in this aspect of the invention so that it chemically attaches or bonds to the target material, like paint attaches and bonds with a wall.

In another aspect of the invention, the type of taggant can be selected based on

the ability of the taggant and/or the substance in which it is located (i.e., a coating) to be removed from the target material. In many instances, the purpose for which the target material is tagged will be temporary. After this purpose is completed, the taggant is no longer needed and can optionally be removed. For example, if an
5 identifying film or coating containing a taggant is applied to a target material, once the target material has been identified, the identifying film of coating may no longer be needed and can be removed by suitable means. Preferably, the coating and/or the taggant is selected in this aspect of the invention so that it is removable by mechanical or chemical means.

10 The amount and concentration of the taggant in the target material can also vary depending on the number of elements used and energy needed. The amount of taggant employed in the present invention is determined by the minimum amount needed for XRF detection. Additional amounts of taggant can be used as described below. The concentration of the taggant is at least about 1 part per million (ppm), and
15 can range from about 1-100 ppm. Larger taggant amounts can be used, but for economic reasons, a small amount is sufficient. Even lower taggant concentrations can be used (i.e, less than 1 ppm) as improved XRF devices and techniques become available.

The form of the taggant in the target material can also vary. The form can be
20 any compound (i.e., salt) or molecule—either small or large—containing the element that is added by itself or with other components. Indeed, the taggant can be combined with various components and/or additives to make a mixture and/or solution. These other components or additives can be selected for various purposes, e.g., to modify the XRF properties, to modify the ability to be inserted into an article/product, to stabilize
25 the mixture or solution, or other purpose known in the chemical arts.

In one aspect of the invention, the at least one taggant is a combination or plurality of taggants. A plurality of taggants could include more than one taggant of the same type, e.g., the same element or compound. A combination of taggants could also be more than one type of taggant, e.g., a different element or compound in
30 different media. For example, a taggant dispersed in ink which has been placed on

paper which also contains the same or different taggant. The plurality of taggants could also include a combination of at least one intrinsic and at least one extrinsic taggant.

5 The at least one taggant incorporated in the target material can provide a distinctive code. Such a code could be based on the number and types of taggants present or absent, an abundance ratio (i.e., concentrations) of the same or different taggants, the location of the taggants within the material (i.e., a barcode made of a series of taggants with a space, where the space could be part of the code), the presence of multiple types or forms of a single taggant, or a combination thereof.

10 As one example of such a code, the present invention can include a system in which the concentration of one taggant in a targeted material is controlled to provide a distinctive code. For example, for tagging ten commercially prepared batches of carpeting, the taggant yttrium oxide can be used. Ten unique codes could then be created for these ten batches by preparing samples of the target material containing
15 various concentrations (i.e., 10 ppm, 20 ppm, ... 100 ppm) of that taggant.

The number of unique codes available with the use of just a single taggant depends on the precision with which that concentration can be controlled and measured in the sample. For example, if techniques allow concentrations in about 10 ppm increments, 10 unique codes (i.e., 10 ppm, 20 ppm, ... 100 ppm) can readily be
20 constructed from a single taggant for that concentration range. Additional codes could be created for larger concentration ranges, e.g., 100 codes of a concentration ranging from 10 ppm to 1000 ppm in 10 ppm increments. With the advent of superior concentration and detection techniques (e.g, for smaller increments), more codes may be constructed.

25 Further, the number of unique codes can be increased by adding additional types and concentrations of the same or different taggants. A significant increase in the number of possible codes can be achieved by using more than one taggant in creating the code. For example, the code can be expanded by adding another taggant with its own specific concentrations. The number of codes can be further expanded
30 by adding a third taggant with its own specific concentrations. Additional taggants

could be used to provide even more codes. This coding system depends on the concentration increments of each of the taggants.

The number of codes available in the coding system could also be increased by varying the location of the taggant(s) within the material to be detected. For example, the detected material could be divided into any number of portions (i.e., quadrants) with certain taggants (or codes) being placed in certain of those portions, and optionally not in others, to signify additional information during the XRF analysis.

When taggants include elements or compounds that may be found in the target material or in the environment to which the target material may be exposed, taggant contamination may occur and possibly render the taggant code difficult to read. For example, if the taggant comprising yttrium oxide is located in carpet as the targeted material, it is possible that additional amounts of the taggant(s) could be present in the targeted material as a result of environmental contamination, an internal chemical reaction, or other contamination. If this contamination occurs, there will be a change in the concentration of that taggant in the target material. Subsequent measurement of this taggant could yield a value corresponding to an incorrect code.

In such an instance, it is difficult to determine what amount of the taggant present in the targeted material is "contamination" as opposed to taggant present before contamination. This problem can be solved in target materials for which contamination might be suspected by using a backup (i.e., duplicate or otherwise) or secondary system, such as a backup or secondary taggant(s), backup or secondary code, or backup or secondary location. See, for example, the description in U.S. Patent No. 5,760,394, the disclosure of which is incorporated herein by reference. If desired, more than one such backup or secondary system can be used. The backup or secondary system can also be used for other purposes, e.g., to verify the original coding system.

Any suitable target material can be employed in the present invention. Suitable target materials include those which intrinsically contain the desired taggant(s) or in which the desired taggant(s) can be incorporated. Because XRF detection measures changes in the inner shell(s) of the taggant, it will not be

significantly modified by chemical reactions that normally occur in the outer shells. Thus, it is possible to tag chemicals and have the taggant code be carried in any product manufactured with those chemicals. Target materials should be comprised of a material in which XRF detection is easy, e.g., little chance of background
5 contamination, taggant deterioration, taggant destruction, contamination, or other deteriorating condition.

Example of suitable target materials include: paper products like documents, currency, or tickets; solid products like jewelry, carpets, packaging (films, labels, and adhesives), metals, rubbers (tires), woods, or plastics (credit cards); liquid products
10 like lubricating fluids, resins, sprays, paints, oils, inks; hazardous wastes; drugs or pharmaceuticals; gaseous products; or combinations or hybrids of these materials. Additionally, suitable target materials—such as paper documents, drugs, or counterfeit manufactured items—include those that will be subsequently changed. For example, a target material that is suspected might be destroyed could be tagged
15 with elements known to be present in the residue from the destruction. Since the taggant is not usually changed by the chemical process in destruction, a connection between the target material and its residue could be established after destruction. Preferably, the target material of the present invention is carpeting and carpet products.

20 The target materials containing the at least one taggant can be used for a wide number of applications. For example, tagging paints would allow any article coated with that paint to be identified. In another example, tagging paper and ink used in the paper (or applied to the paper) can be used to establish the authenticity of documents and currency. In yet another example, many manufactured items prone to
25 counterfeiting or theft could benefit from tagging. Tagged threads in clothing could be used to encode information about the date, time, and place of manufacture. Tagging the bulk materials used in the manufacture of such items as compact disks, computer disks, video tapes, audio tapes, electronic circuits, and other items would be useful in tracing and prosecuting theft and counterfeiting cases involving these items.

In the present invention, the at least one taggant can be incorporated into the target material in any suitable form. Suitable forms include those which place that taggant in the target material with little to no damage (either chemical or physical) to the target material. See, for example, the description in U.S. Patent Nos. 5,208,630, 5,760,394, and 6,030,657, the disclosures of which are incorporated herein by
5 reference. Other suitable forms include using materials containing the taggant such as particulates like microparticles; solvents; coatings and films; adhesives; sprays; or a hybrid or combination of these methods. In any of these forms, the at least one taggant can be incorporated by itself or with another agent.

10 The at least one taggant can be incorporated in the target material using any suitable technique. Many existing tagging techniques involve the use of microparticles containing the elements, or compounds or compositions of the elements, comprising the at least one taggant. Additionally, particles can be manufactured wherein smaller particles, or compounds or compositions of the
15 elements, containing the taggant. Such particles could be made of: magnetic or fluorescent materials to facilitate collection; refractory materials to enhance particle survival in an explosion; or chemically inert materials to enhance particle survival in a chemical reaction. Indeed, such particles could be made of non-durable, soluble, or reactive materials to enhance taggant dispersal in a fluid, aerosol, or powder system.

20 When the target material is a liquid article like paints or inks, or adhesives, or has a liquid component, the at least one taggant can be incorporated as an element or compound in solution with the liquid. Thus, the at least one taggant can be incorporated in elemental or compound form either in solution or suspension in the target material. The at least one taggant could also be dissolved or suspended in a
25 solvent used in making the target material so that when that solvent evaporates, the residue left behind would contain the at least one taggant.

The taggant can be inserted into the target material of an article either during or after the article (or a part thereof) has been manufactured. The taggant can be manufactured as a component of the article or as part of a component of the article.
30 During manufacture, the at least one taggant can also be incorporated into another

material which comprises part of the target material. Indeed, the at least one taggant could also be an element or compound of the target material itself. The taggant can be incorporated into any location (including surfaces) of the article. Two (and three) dimensional shapes and patterns of the at least one taggant can be constructed using
5 any desired combination of types and numbers of taggants.

The at least one taggant could also be incorporated after manufacture of the target material of the article. The taggant can be implanted into the article or deposited as a coating or film on the article. Additionally, the at least one taggant could be incorporated into the already formed target material as a dopant.

10 As a coating or film, the at least one taggant could be physically or chemically deposited by itself. The at least one taggant could also be incorporated as one ingredient (or contaminant) of another material (such as a mixture or solution) which forms a coating or film. In this aspect of the invention, the at least one taggant can be incorporated as an element or compound in solution (or suspension) with a liquid
15 which is applied, such as by spraying, to the article. For example, the at least one taggant could be dissolved or suspended in a solvent so that when that solvent evaporates after being applied to the article, the residue left behind would contain the at least one taggant.

As apparent from the description above, the present invention has the ability to
20 easily tag small batches of target materials with a code unique to that batch. This can be done manually or in an automated system where each batch (or select batches) of the target material receives a different code. For example, 1000 (or 100) compact discs could be manufacture and each could be tagged with a code of a number from 1 to 1000 (or 1 to 100). Economic and processing considerations, however, might limit
25 the minimum size of each batch and the number of batches which could be tagged.

As described above, any product or article as the target material can have at least one extrinsic or intrinsic taggant located therein. For example, the target material of the present invention is carpeting and carpet products. Carpets generally comprise both a yarn and a backing. The yarn may be tufted or locked into the backing in a
30 variety of ways, each affecting the texture and durability of the carpet. The yarn may

comprise different types of materials, usually fibers, with differing types of twists and shapes to change the look of the carpet. The fibers can be made of nylon, polypropylene, polyester, acrylic, wool, or a combination thereof. Carpet and carpet components and their method of manufacture are known in the art. See, for example, 5 U.S. Patent No. 6,030,685, the disclosure of which is incorporated herein by reference.

The at least one taggant of the present invention could be present in the yarn or backing of the carpet. For example, the at least one taggant could be present in the fiber materials when they are made. In another example, the at least one taggant could 10 be present in a separate fiber material which could then be combined with a yarn (not containing any taggant) during the twisting process. In yet another example, the at least one taggant could be present in the backing.

As described above, the present invention can detect at least one taggant that is intrinsically present in a target material. In one aspect of the present invention, the 15 presence (and concentration) of materials intrinsically present in carpets can be detected. For example, the presence and amount of titanium dioxide in yarn fibers of carpet could be determined using the methods and apparatus of the present invention.

Carpet manufacturers often make carpets with a specific level of titanium dioxide (TiO_2). The TiO_2 is often impregnated in the material of the yarn fibers, e.g., 20 the nylon. TiO_2 makes the carpet appear more like wool. TiO_2 also exhibits the ability to bind with dyes used in the process for manufacturing the carpets, thereby enhancing the color of the carpets. See, for example, the description in U.S. Patent No. 5,830,572, the disclosure of which is incorporated herein by reference. Hopefully, the carpets are made with a substantially uniform TiO_2 concentration 25 throughout the fibers and yarn, thereby yielding a substantially uniform color and consistency.

Unfortunately, the process for incorporating TiO_2 into yarn fibers does not often achieve the desired consistency. Unsure of the TiO_2 consistency, carpet manufacturers often verify the TiO_2 levels in the yarn fibers by a destructive and 30 lengthy procedure. In this procedure, the carpet manufacturers select several samples

of yarn fibers, hopefully representing a uniform distribution across the carpet. Each sample (or group of samples) of yarn fibers is then weighed and then burned. The residue from the burning process is the TiO_2 , which is then gathered and weighed. Using the weight of the yarn fiber and the weight of the TiO_2 residue, the TiO_2 concentration for each sample can be calculated and compared with other samples to measure the TiO_2 consistency.

In one aspect of the present invention, this destructive and long procedure used by the carpet manufacturers can be replaced with a quick XRF detection method according to the present invention. In this detection method, the carpet to be measured is selected. Instead of removing and burning the yarn fibers, the desired locations for measuring the TiO_2 levels are selected. Then, the yarn fibers are detected via an XRF analysis using the apparatus and methods of the present invention. The XRF analysis would report the concentration of the TiO_2 at each selected location. The various TiO_2 concentrations could then be compared for consistency.

In another aspect of the invention, at least one other taggant (other than the TiO_2) could easily be incorporated into carpet products while manufacturing the carpets with TiO_2 . In this aspect of the invention, this at least other taggant, including any metal oxide such as calcium oxide (CaO), could be incorporated into the carpet so that each batch of carpet has its own code. The taggant could be introduced into the yarn fiber by injecting a solid (i.e., microparticle) or liquid (e.g., solvent) containing the at least one taggant into the bulk material of the fiber (i.e., nylon) before that bulk material is made into a fiber. When the nylon is made into fibers and then twisted into yarn, the yarn will contain TiO_2 and the at least one other taggant. Assuming two taggants will be used, a number of automated reservoirs having varying concentrations of the two taggants could be included in the assembly line process. Each reservoir would contain the distinctive mix of taggant concentrations, e.g., 5/5, 5/10, 5/15, ... 10/5, 10/10, 10/15, ... 95/85, 95/90, 95/95. As the sample of the bulk material for the yarn fiber passes through the assembly line, it would receive the

taggants from the desired reservoir. Thus, each yarn manufactured from such material would receive a unique combination of taggants for its code.

After the at least one taggant is extrinsically or intrinsically present in the target material(s), the taggant(s) is detected to identify or verify the target material using XRF analysis as illustrated in Figure 1. Primary x-rays 40 are used to excite a sample of the target material 46, and the secondary x-rays 44 that are emitted by the sample are detected and analyzed.

As shown in Figure 3, the x-rays which are detected have various energies, e.g., there is a broad band of scattered x-rays with energies less than and greater than those of the exciting atom. Figure 3 illustrates this spectrum for paper as the target material. Within this broad band, there are peaks due to the excitation of the taggant(s) in the sample. The ratio of the intensity of the radiation in any peak to the intensity of the background at the same energy (known as the peak-to-background ratio) is a measure of the concentration of the element which has characteristic X-rays at the energy of that peak, e.g., the taggant.

In one aspect of the detection method of the present invention, at least one target material believing to contain known concentrations of the taggant(s) of interest is selected. The XRF analysis is performed on that target material (or a sample thereof) using a detection device or apparatus containing an x-ray radiation source ("source"), x-ray radiation detector ("detector"), support means, analyzer means, and calibration means.

One aspect of the detection device of the present invention is illustrated in Figure 4a. In this Figure, the detection apparatus 25 has an ordinary x-ray fluorescence spectrometer capable of detecting elements present in a coating, package or material. X-rays 29 from a source (e.g., either x-ray tube or radioactive isotope) 20 impinge on a sample 11 which absorbs the radiation and emits x-rays 31 to an x-ray detector 21 and analyzer 23 capable of energy or wavelength discrimination. This is accomplished by using a commercially available x-ray spectrometer such as an Edax DX-95 or a MAP-4 portable analyzer, commercially available from Edax Inc., Mahwah, New Jersey. Part of analyzer 23 includes a computerized system 27.

Another aspect of the detection apparatus of the present invention is illustrated in Figure 4b. In this Figure, the detection apparatus 25 has an instrument housing 15 which contains the various components. Gamma rays or x-rays 30 from a source (e.g., either x-ray tube or radioactive isotope) 20 are optionally focused by aperture 10 to impinge on a sample 11. Sample 11 contains the at least one taggant which absorbs the radiation and emits x-rays 31 to an x-ray detector 21. Optionally, analyzing means can be incorporated within housing 15.

The present invention, however, is not limited to the detection apparatus depicted in Figures 4a and 4b. Any suitable source, or plurality of sources, known in the art can be used as the source in the detection device of the present. See, for example, U.S. Patent Nos. 4,862,143, 4,045,676, and 6,005,915, the disclosures of which are incorporated herein by reference. During the XRF detection process, the source bombards the taggant with a high energy beam. The beam may be an electron beam or electromagnetic radiation such as X-rays or gamma rays. The source, therefore, may be any material which emits such high energy beams. Typically, these have been x-ray emitting devices such as x-ray tubes or radioactive sources.

To target, the beam can be focused and directed properly by any suitable means such as an orifice or an aperture. The configuration (size, length, diameter...) of the beam should be controlled, as known in the art, to obtain the desired XRF detection. The power (or energy level) of the source should also be controlled, as known in the art, to obtain the desired XRF detection.

The source(s) can be shielded and emit radiation in a space limited by the shape of the shield. Thus, the presence, configuration, and the material used for shielding the source should be controlled for consistent XRF detection. Any suitable material and configuration for that shield known in the art can be employed in the present invention. Preferably, any high-density materials used as the material for the shield, e.g, tungsten or brass.

Any suitable detector, or plurality of detectors, known in the art can be used as the detector in the detection device of the present invention. See, for example, U.S. Patent Nos. 4,862,143, 4,045,676, and 6,005,915, the disclosures of which are

incorporated herein by reference. Any type of material capable of detecting the photons omitted by the taggant may be used. Silicon and CZT (cadmium-zinc-telluride) detectors have been conventionally used, but others such as proportional counters, germanium detectors, or mercuric iodide crystals can be used.

5 Several aspects of the detector should be controlled to obtain the desired XRF detection. First, the geometry between the detector and the target material should be controlled. The XRF detection also depend on the presence, configuration, and material—such as tungsten and beryllium—used as a window to allow x-rays photons to strike the detector. The age of the detector, voltage, humidity, variations in
10 exposure, and temperature can also impact the XRF detection and, therefore, these conditions should be controlled.

 The analyzer means sorts the radiation detected by the detector into one or more energy bands and measures its intensity. Thus, any analyzer means performing this function could be used in the present invention. The analyzer means can be a
15 multi-channel analyzer for measurements of the detected radiation in the characteristic band and any other bands necessary to compute the value of the characteristic radiation as distinct from the scattered or background radiation. See, for example, U.S. Patent Nos. 4,862,143, 4,045,676, and 6,005,915, the disclosures of which are incorporated herein by reference.

20 The XRF also depends on the resolution of the x-rays. Background and other noise must be filtered from the x-rays for proper measurement, e.g., the signals must be separated into the proper number of channels and excess noise removed. The resolution can be improved by cooling the detector using a thermoelectric cooler—such as a nitrogen or a peltier cooler—and/or by filtering. Another way to improve
25 this resolution is to use pre-amplifiers.

 The support means supports the source and detector in predetermined positions relatively to a sample of the target material to be irradiated. Thus, any support means performing this function could be used in the present invention. In one example, the support means comprises two housings, where the source and detector are mounted in
30 a first housing which is connected by a flexible cable to a second housing in which the

analyzer means is positioned as illustrated in Figure 4a. If desired, the first housing may then be adapted to be hand-held. In another example, the source and detector as well as the other components of the detection device are mounted in a single housing as illustrated in Figure 4b.

5 The calibration means are used to calibrate the detection apparatus, thus insuring accuracy of the XRF analysis. In this calibration, the various parameters which could be modified and effect the measurement are isolated and calibrated. For example, the geometrical conditions or arrangements can be isolated and calibrated. In another example, the material matrix are isolated and calibrated. Preferably,
10 internal (*in situ*) calibration during detection is employed as the calibration means in the present invention. Components, such as tungsten shielding, are already present to internally calibrate during the XRF analysis. Other methods, such as fluorescence peak or Compton backscattering, could be used for internal calibration in the present invention.

15 Analyzer means, which includes a computerized system 27, is coupled to, receives, and processes the output signals produced by detector 21. The energy range of interest, which includes the energy levels of the secondary x-ray photons 44 emitted by the taggant(s), is divided into several energy subranges. Computerized system 27 maintains counts of the number of X-ray photons detected within each
20 subrange using specific software programs, such as those to analyze the detection and x-ray interaction and to analyze backscatter data. After the desired exposure time, computerized system 27 with display menus stops receiving and processing output signals and produces a graph of the counts associated with each subrange.

 Figure 5 is a representative graph of the counts associated with each subrange.
25 This graph is essentially a histogram representing the frequency distribution of the energy levels E1, E2, and E3 of the detected x-ray photons. Peaks in the frequency distribution (i.e., relatively high numbers of counts) occur at energy levels of scattered primary x-ray photons as well as the secondary x-ray photons from the taggant(s). A primary x-ray photon incident upon a target material may be absorbed or scattered.
30 The desired secondary x-ray photons are emitted only when the primary x-ray photons

are absorbed. The scattered primary x-ray photons which reach the detector of the system create an unwanted background intensity level. Accordingly, the sensitivity of XRF analysis is dependent on the background intensity level, and the sensitivity of XRF detection may be improved by reducing the amount of scattered primary x-ray photons reaching the detector. The peak occurring at energy levels of scattered primary x-ray photons is basically ignored, while the other peaks—those occurring at E1, E2, and E3—are used to identify the at least one taggant present in the target material.

Besides the parameters described above, at least two other parameters must be controlled during the process of XRF detection. First, the media (such as air) through which the gamma rays (and x-rays) must travel also impacts the XRF. Therefore, the different types of media must be considered when performing the XRF analysis. Second, the methods used to interpret and analyze the x-rays depend, in large part, on the algorithms and software used. Thus, methods must be adopted to employ software and algorithms that will consistently perform the XRF detection.

These two parameters, plus those described above, must be carefully accounted for and controlled to obtain accurate measurements. In one aspect of the invention, these parameters could be varied and controlled to another provide a distinct code. For example, using a specific source and a specific detector with a specific measuring geometry and a specific algorithm could provide one distinct code. Changing the source, detector, geometry, or algorithm could provide a whole new set of distinct codes.

Figure 6 illustrates a preferred apparatus and detection method according to the present invention. In this Figure, detection apparatus 25 is capable of detecting at least one taggant present in target material 10, such as a sample of carpet. Detection apparatus 25 is a portable device which can be small enough to be hand-held. Detection apparatus 25 contains all the components discussed above (i.e., source, detector, analyzer means, and calibration means) in a single housing, thus allowing the portability and smaller size.

The present invention is not limited to any specific XRF analysis. Any type of XRF, such as total reflection x-ray fluorescence (TXRF), can be employed in the present invention.

5 In one aspect of the invention, the apparatus and method used identify an article once it has been tagged. The ability to invisibly tag an article and read the tag, especially through a non line-of-sight method, would provide an invaluable asset in any industry that authenticates, verifies, tracks, labels, or distributes goods of any kind. Indeed, having an invisible taggant(s) could further prevent copying and counterfeiting of goods. In another aspect of the invention, the apparatus and method
10 of the present invention could be used for these same purposes, but for those products that have the desired taggant already located therein. Thus, the present inventions could analyze liquid flows for contaminant particles or pinpoint via 3-D analysis the exact location of a contaminant(s) in an article.

The following non-limiting examples illustrate the present invention.

15 Example 1

Two samples of carpet containing TiO_2 were obtained for analysis. These carpet samples were analyzed for the presence of the titanium. A portable, hand-held detection apparatus similar to that illustrated in Figure X was used to detect the presence of the titanium taggant using XRF analysis. An area approximately one inch
20 square, located in the center of one sample, was analyzed for the presence of the titanium taggant using the detection apparatus described below. The result of the XRF analysis is reported in Figure 7, with the labeled peak indicating the presence of the Ti taggant.

The detection apparatus contained several components. A trigger actuated
25 tungsten shutter block containing an Iron 55 gamma ray point source and a silicon pin x-ray detector were located within the front of the instrument. Circuit boards, necessary for acquiring and processing the data from the detector were located within the rest of the housing. The instrument had a red and a green light to indicate whether the carpet was tagged or not and a read out to inform the user that the carpet was
30 tagged or not. A keypad on the top of the instrument allowed the user to turn the

electronics of the instrument on and off, while a key operated lock on the side of the instrument kept the user from inadvertently opening the shutter block, exposing the radioactive source.

Example 2

5 A sample of carpet yarn containing TiO_2 was obtained and analyzed to determine the concentration of the titanium across the yarn sample. Five, one-inch locations (spots 1, 2, 3, 4, and 5) along the length of the yarn sample were selected for analysis. A portable, hand-held detection apparatus identical to that described in Example 1 was used to analyze each location five separate times (for one minute
10 each). The five data sets for each location were then averaged together and reported in Figure 8. As illustrated in Figure 8, the difference in titanium concentration (which is related to the number of counts and the height of the peak) over the five locations was negligible.

 Having described the preferred aspects of the present invention, it is
15 understood that the invention defined by the appended claims is not to be limited by particular details set forth in the above description, as many apparent variations thereof are possible without departing from the spirit or scope thereof.

CLAIMSWe claim:

1. A method for detecting at least one taggant in an article, comprising:
providing the at least one taggant in a portion of the article;
5 causing the at least one taggant to radiate at least one x-ray; and
analyzing whether the at least one x-ray has a specific energy.
2. The method of claim 1, wherein the article is at least one carpet.
3. A method of analyzing an article, comprising
providing a portion of the article;
10 irradiating that portion with an energy beam; and
analyzing whether that portion irradiates at least one x-ray with a specific
energy.
4. The method of claim 3, wherein the article is at least one carpet.
5. A method of manufacturing an article containing at least one taggant,
15 comprising:
providing a portion of the article; and
providing at least one taggant into that portion, the at least one taggant
radiating at least one x-ray when an energy beam is impinged thereon.
6. The method of claim 5, wherein the article is at least one carpet.
- 20 7. An article containing at least one taggant made by the method
comprising:
providing a portion of the article; and
providing at least one taggant into that portion of the article, the least one
taggant radiating at least one x-ray when an energy beam is impinged thereon.
- 25 8. The article of claim 7, wherein the article is at least one carpet.
9. At least one carpet comprising at least one taggant, the at least one
taggant radiating at least one x-ray when an energy beam is impinged thereon.
10. A method of tagging an article with at least one taggant comprising:
providing a portion of the article; and

providing at least one taggant in that portion of the article, the at least one taggant radiating at least one x-ray when an energy beam is impinged thereon.

11. The method of claim 10, wherein the article is at least one carpet.

12. A method for making a carpet containing at least one taggant,

5 comprising:

providing at least one yarn comprising at least one taggant which radiates at least one x-ray when an energy beam is impinged thereon;

providing a backing; and

tufting the at least one yarn into the backing.

10 13. A method for making a carpet containing at least one taggant,

comprising:

providing at least one fiber comprising at least one taggant which radiates at least one x-ray when an energy beam is impinged thereon;

twisting the at least one fiber into at least one yarn;

15 providing a backing; and

tufting the at least one yarn into the backing.

14. A carpet containing at least one taggant made by the method comprising:

providing at least one yarn comprising at least one taggant which radiates at least one x-ray when an energy beam is impinged thereon;

20 providing a backing; and

tufting the at least one yarn into the backing.

15. A carpet containing at least one taggant made by the method comprising:

providing at least one fiber comprising at least one taggant which radiates at least one x-ray when an energy beam is impinged thereon;

ABSTRACT

An apparatus and method in which one or more taggants that are intrinsically located—or extrinsically placed—in an article or product, such as carpet. The taggants are detected by x-ray fluorescence analysis to identify or verify the article or
5 its point of manufacture. The taggants are manufactured as part of the article or the taggant is placed into a coating, label, or otherwise embedded within the article for the purpose of later verifying the presence or absence of these elements by x-ray fluorescence, thus determining the unique elemental composition of the taggant within the article.

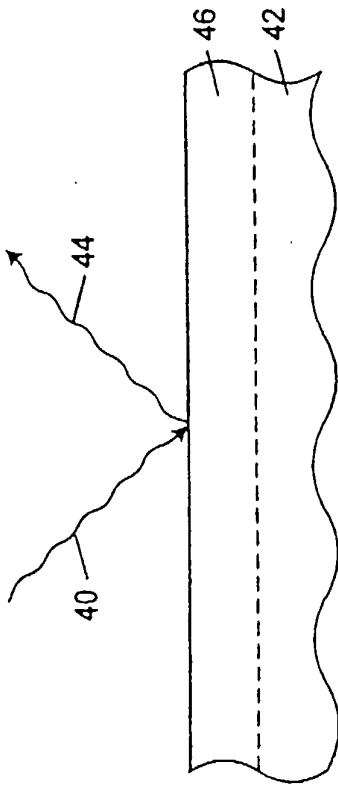


FIG. 1

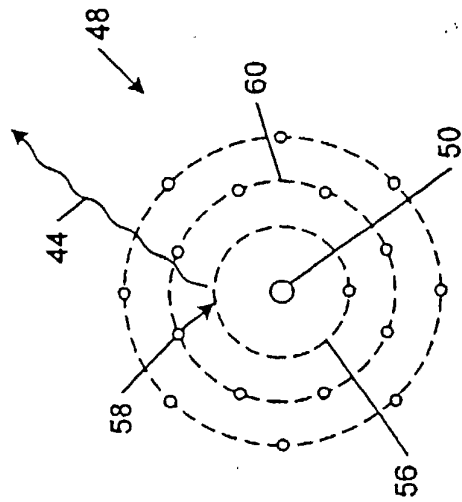


FIG. 2b

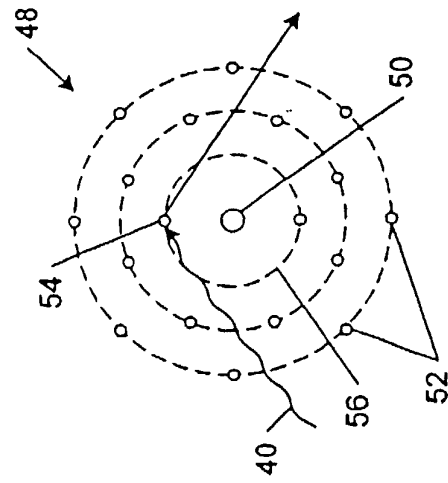


FIG. 2a

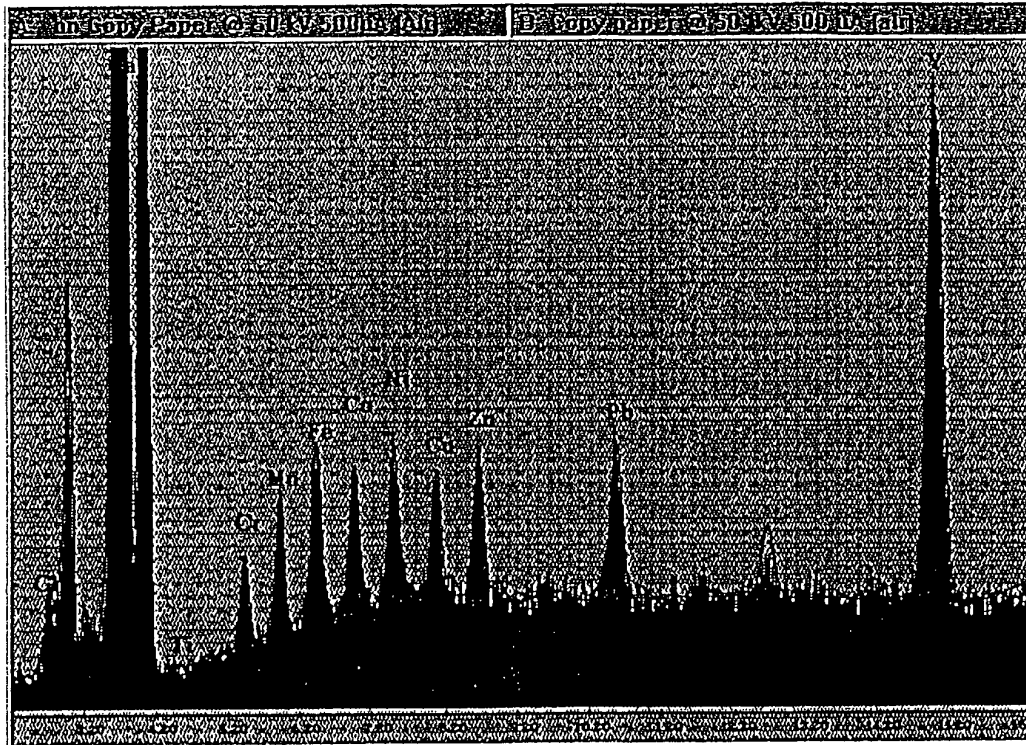


FIG. 3

25

3/8

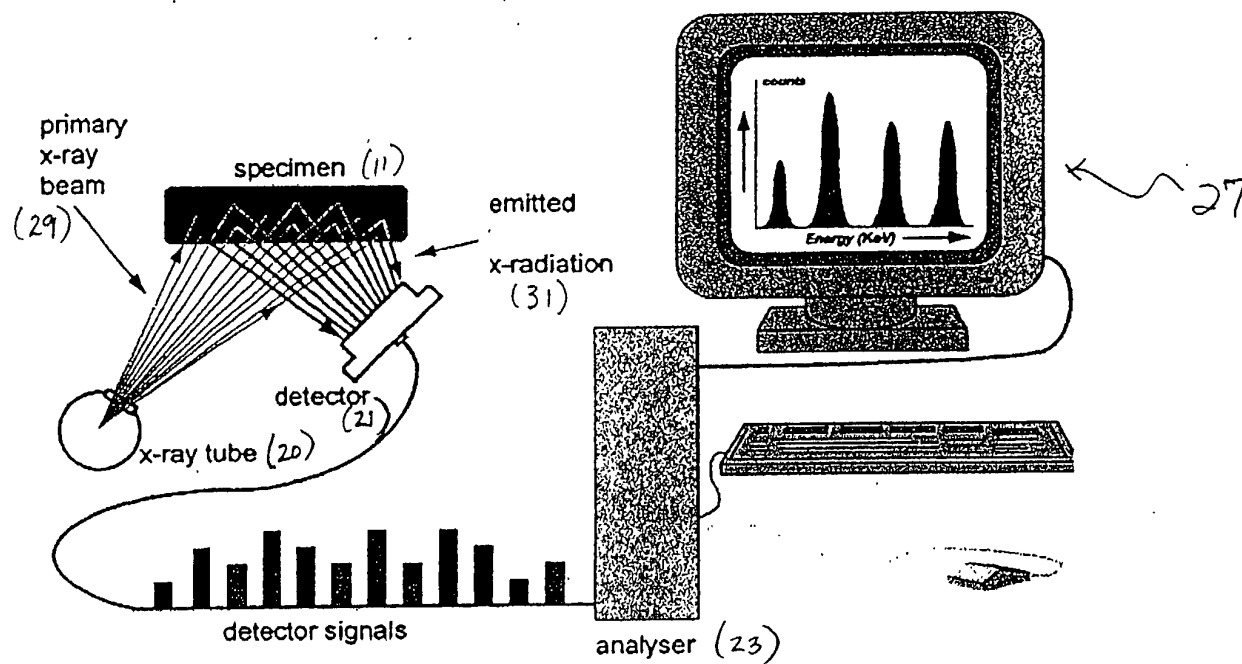


FIG. 4a

25
↓

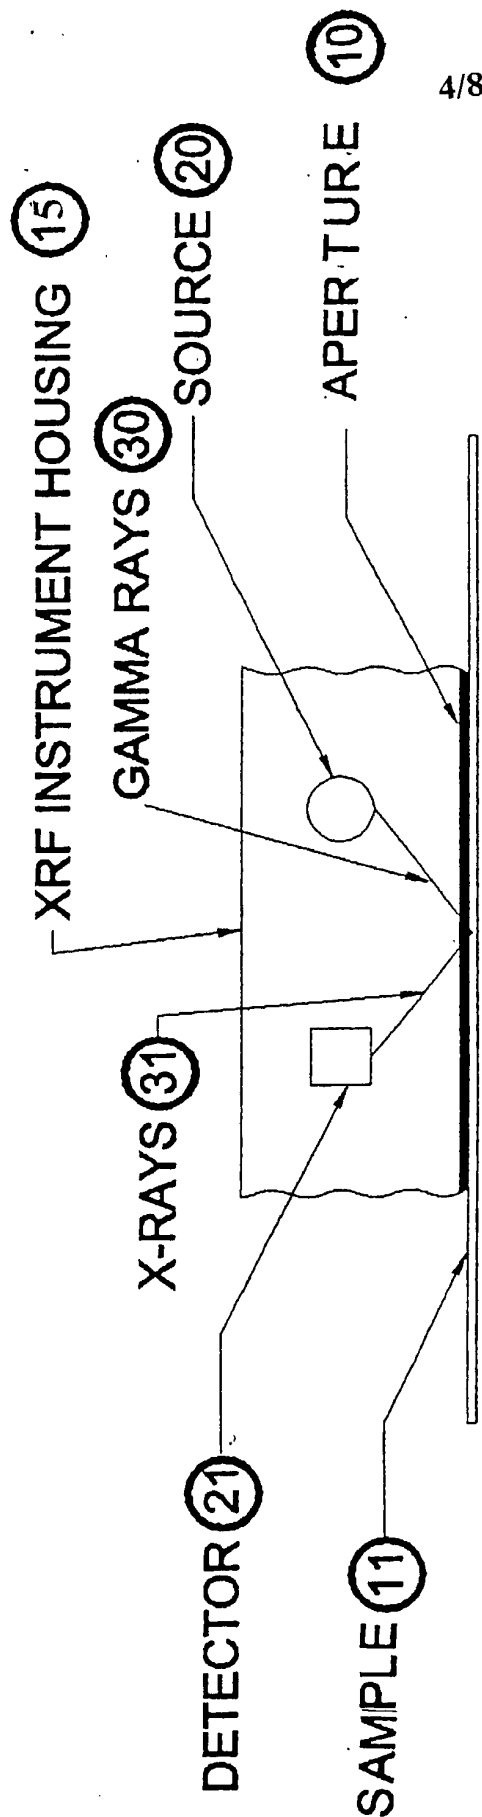


FIG. 4b

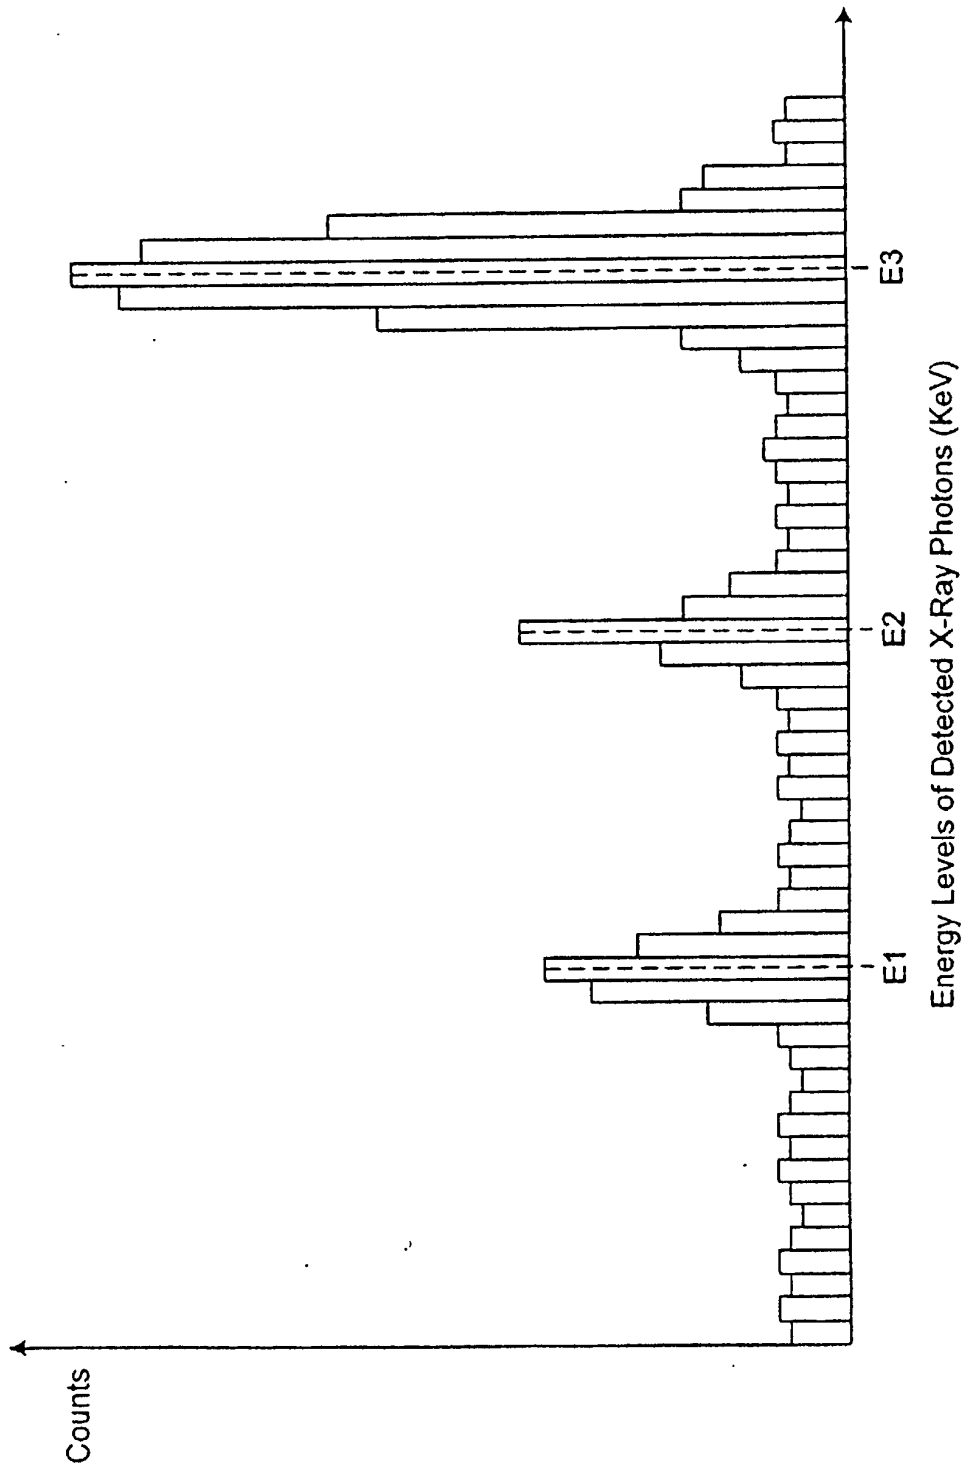


FIG. 5

6/8

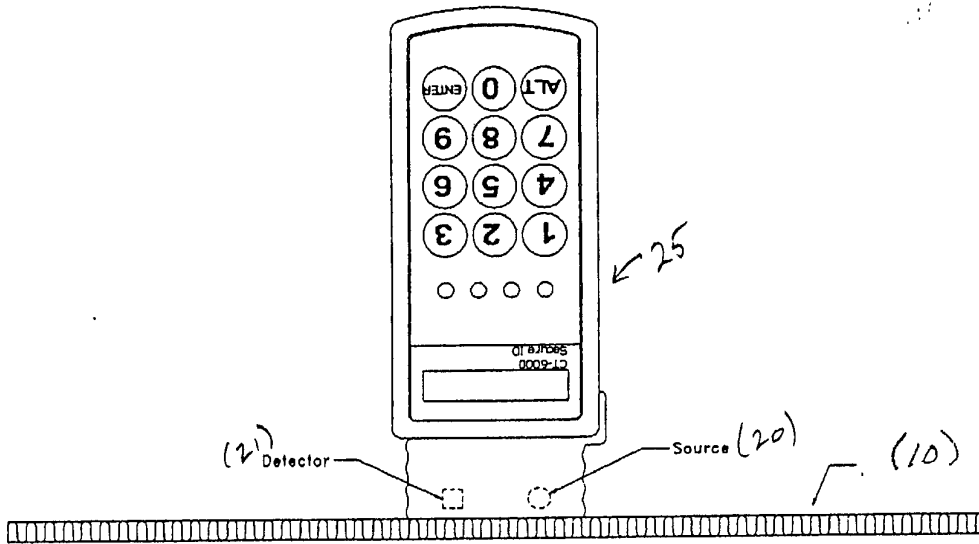


FIG. 6

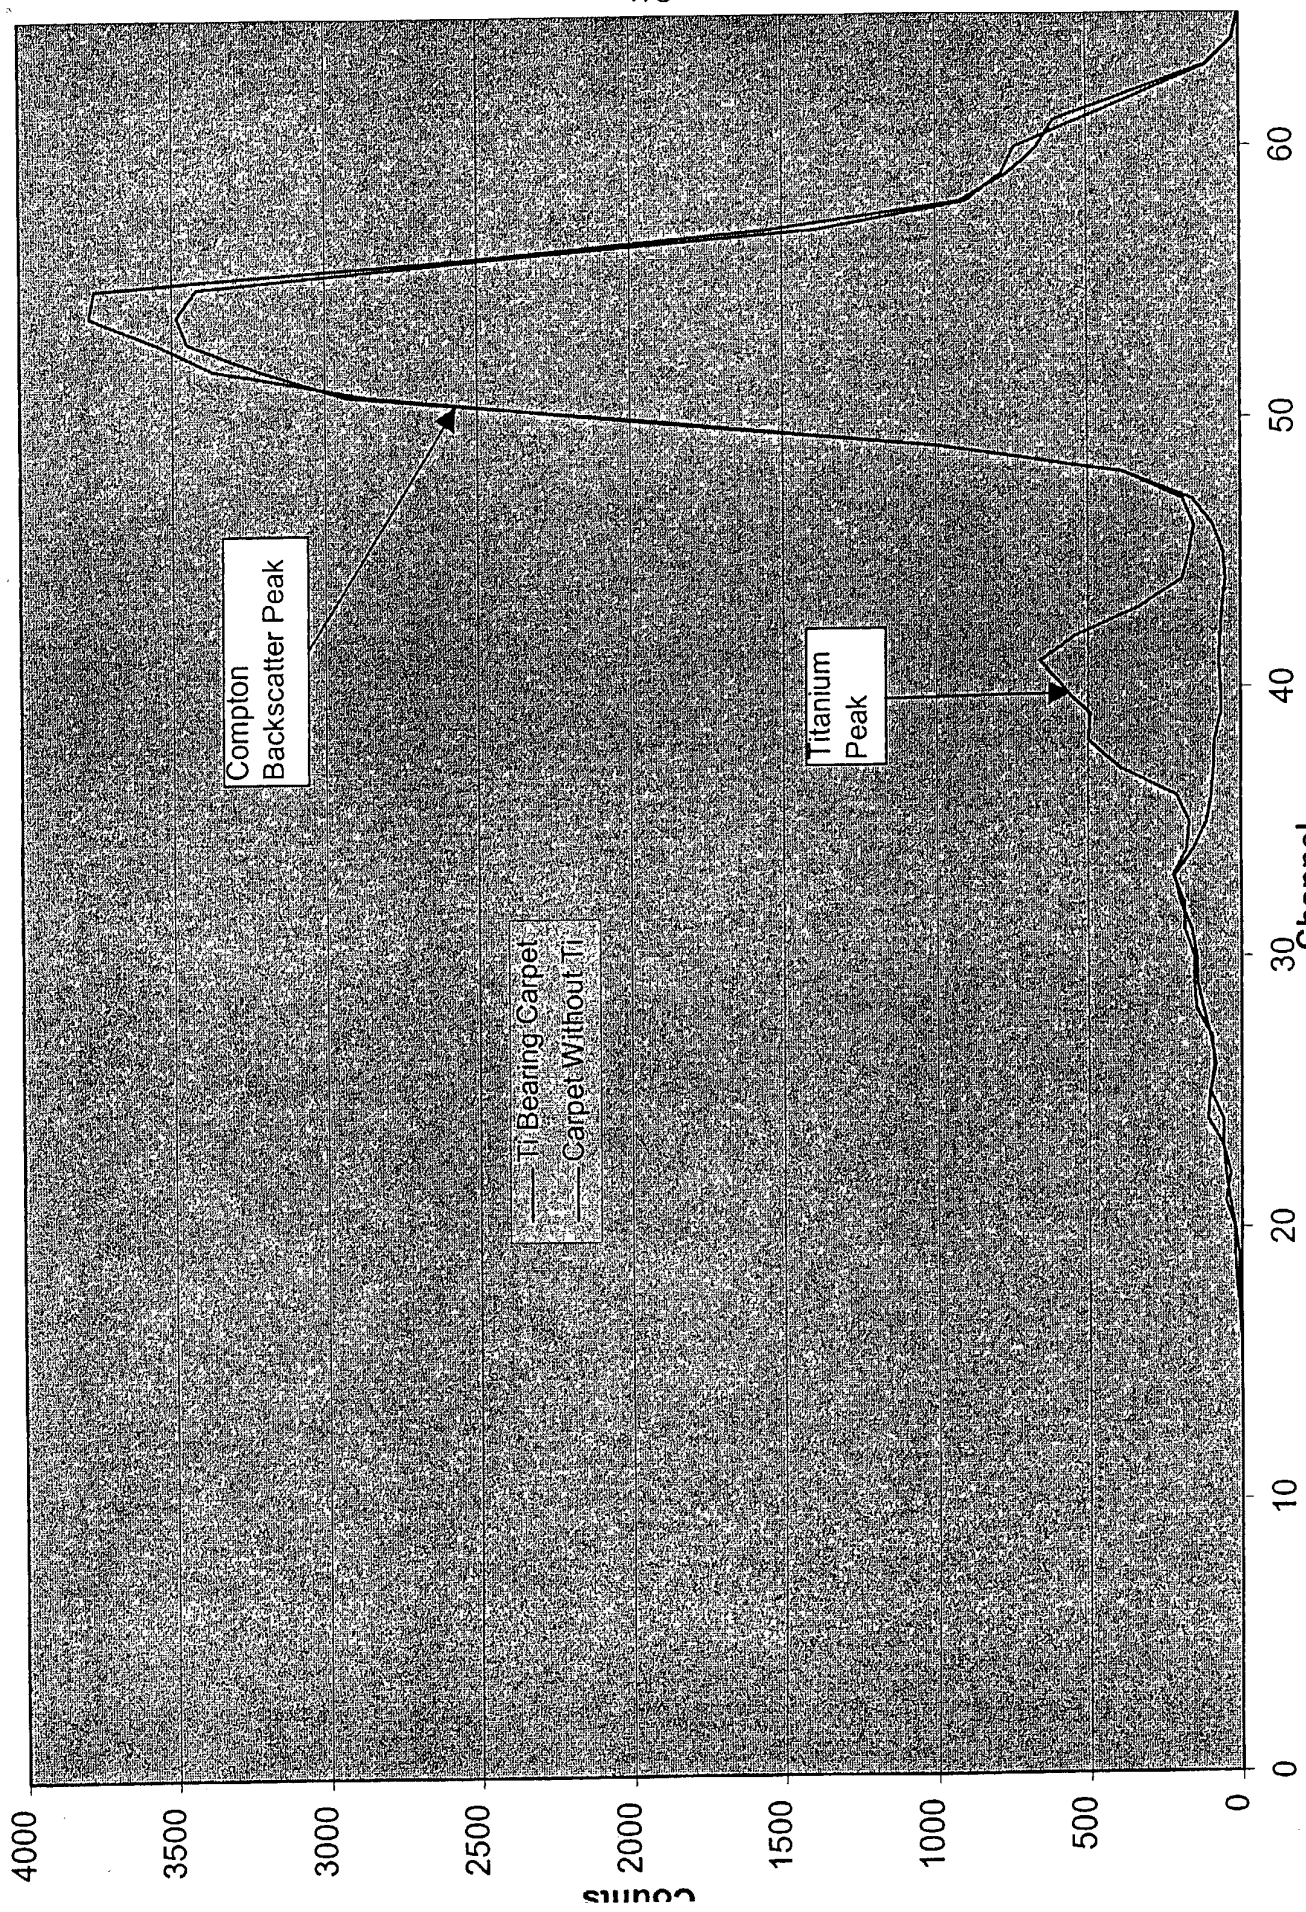


FIG. 7

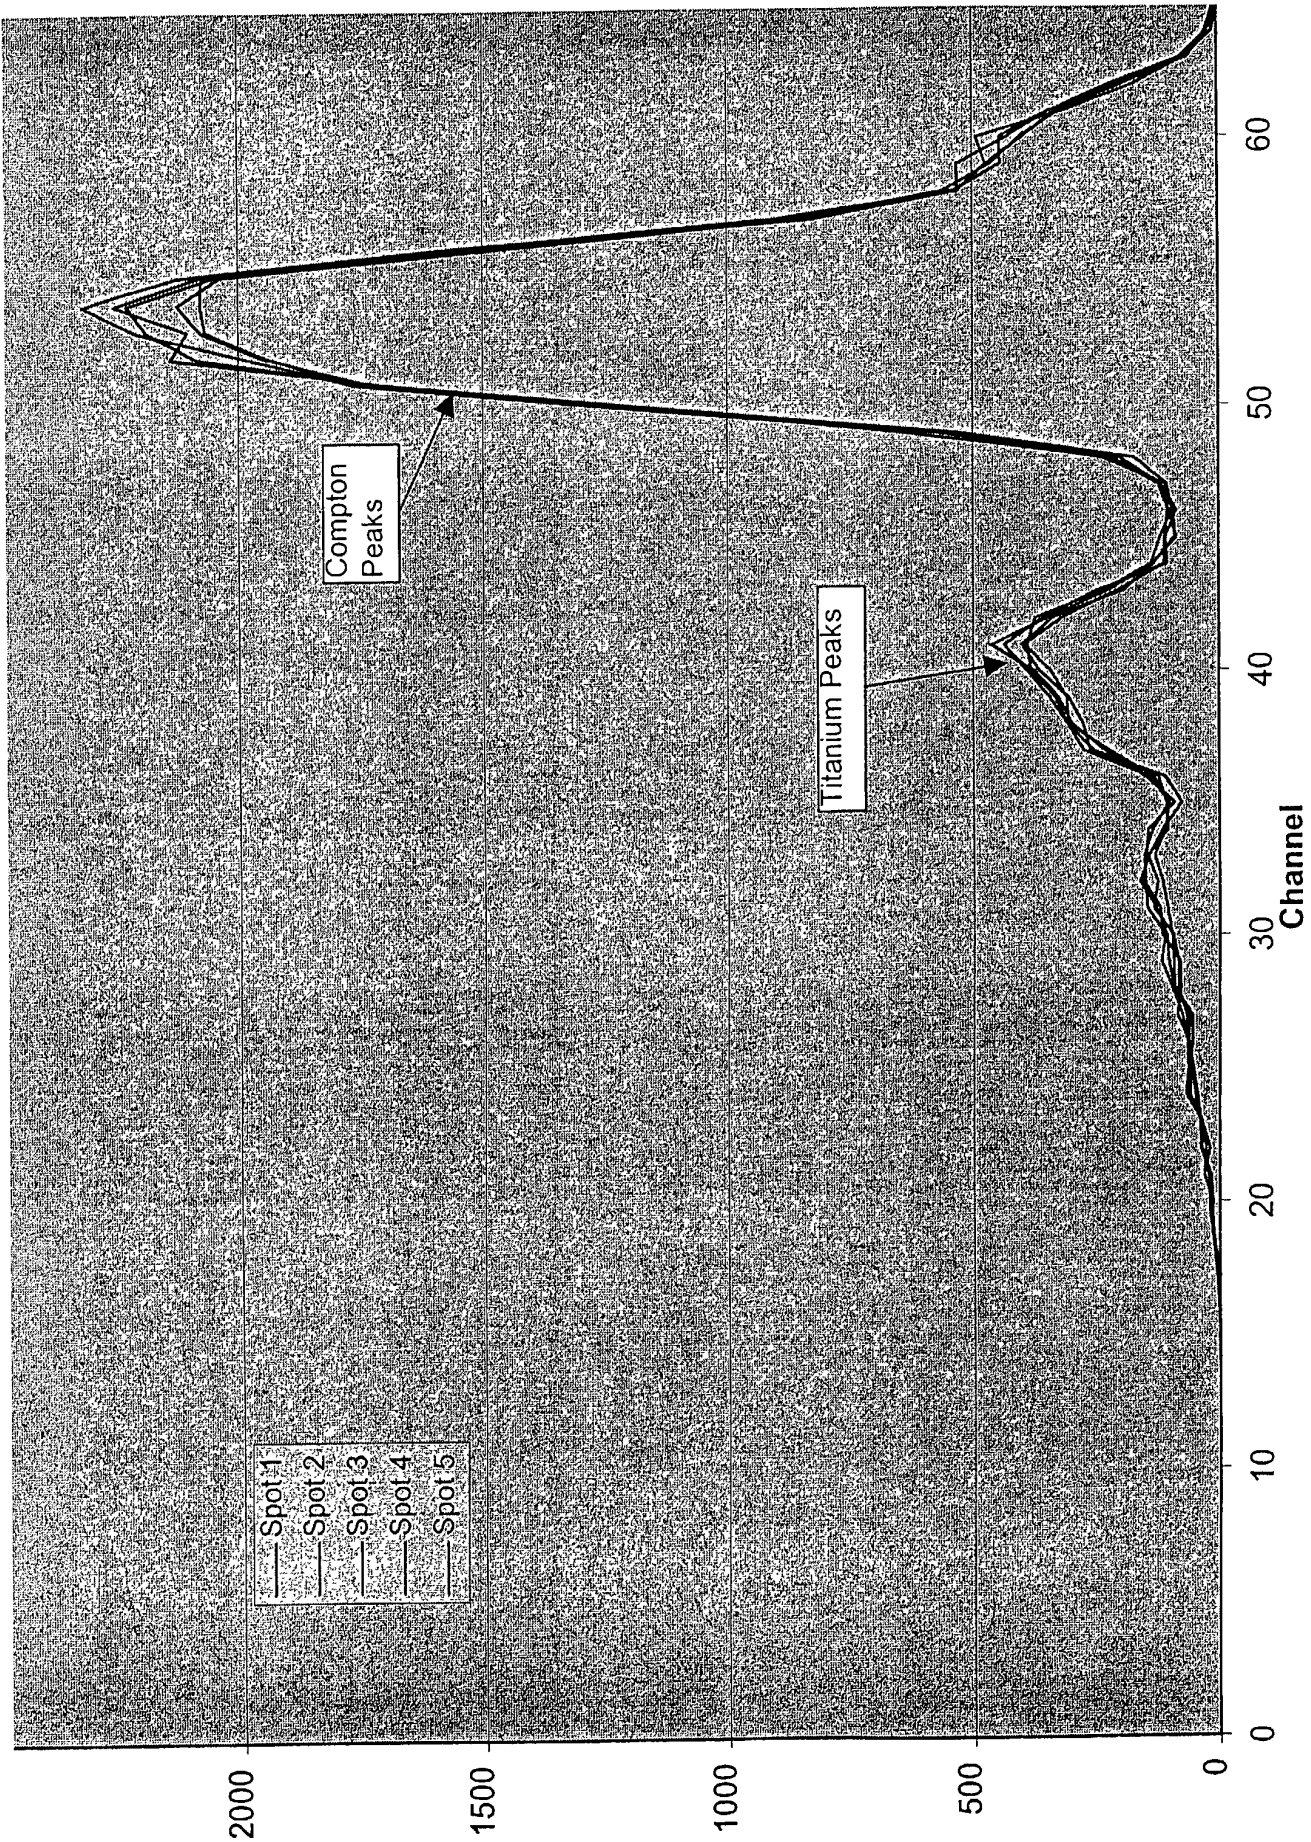


FIG. 8



10089870 100802

ATTORNEY DOCKET NO. 40012.066
SERIAL NO. 10/089,870
CONFIRMATION NO. 1307

DECLARATION FOR PATENT APPLICATION (WITH POWER OF ATTORNEY)

As an inventor named below or on any attached continuation page, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled METHODS FOR IDENTIFICATION AND VERIFICATION, the specification of which (check one):

☐ is attached hereto.

☒ was filed on April 3, 2002, as United States Patent Application Serial No. 10/089,870 and was amended on

☐ was filed on _____ as PCT international application no. _____ and was amended under PCT Article 19 on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to the patentability of the subject matter claimed in this application, as "materiality" is defined in Title 37, Code of Federal Regulations § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate or § 365(a) of any PCT international application(s) designating at least one country other than the United States of America listed below and on any attached continuation page and have also identified below and on any attached continuation page any foreign application for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America having a filing date before that of the application(s) on which priority is claimed.

Prior foreign/PCT application(s):

Priority Claimed

PCT/US00/27423	USA	4 October 2000	X	
(number)	(country)	(day/month/year filed)	Yes	No
(number)	(country)	(day/month/year filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or § 365(c) of PCT international application(s) designating the United States of America listed below and on any attached continuation page and, insofar as the subject matter of each of the claims of this application is not disclosed in any such prior application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations § 1.56 which became available between the filing date of such prior application and the national or PCT international filing date of this application:

S000781.DOC

ATTORNEY DOCKET NO. 40012.066
 SERIAL NO. 10/089,870
 CONFIRMATION NO. 1307

(application serial no.)	(filing date)	(status - pending, patented or abandoned)
(application serial no.)	(filing date)	(status - pending, patented or abandoned)

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.		
Application Number (s)	Filing Date (MM/DD/YY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.
60/157,573	10/04/1999	

I hereby appoint the practitioners listed under Customer Number 27,966, as well as those listed below, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Kenneth E. Horton, Reg. No. 39,481, Steven L. Nichols, Reg. No. 40,326, and D. Delos Larson, Reg. No. 46,118

Address all correspondence to:

Kenneth E. Horton
Rader, Fishman & Grauer, PLLC
River Park Corporate Center One
10653 S. River Front Parkway, Suite 150
South Jordan, UT 84095
(801) 572-8106

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1. Full name of first inventor: Bruce Kaiser

Inventor's signature: Bruce Kaiser

Date: Sep 24, 2002

Residence: Draper, Utah

Citizenship: U.S.A.

Post Office Address: 587 E. Golden Pheasant Drive
Draper, UT 84020

ATTORNEY DOCKET NO. 40012.066
SERIAL NO. 10/089,870
CONFIRMATION NO. 1307

2. Full name of second inventor: 2 D
Don Kenning

Inventor's signature: Don Kenning Date: 9/24/2002

Residence: Kennewick, WA

Citizenship: U.S.A.

Post Office Address: 9000 West Metaline Avenue
Kennewick, WA 99352

3. Full name of third inventor: 3 D
Robert D. Kuhlman


Inventor's signature: Robert D. Kuhlman Date: SEPT 24, 2002

Residence: Richland, Washington

Citizenship: U. S. A.

Post Office Address: 1018 Winslow Avenue
Richland, WA 99352

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

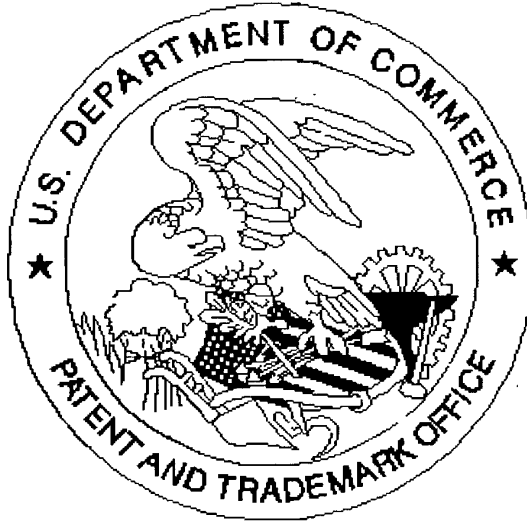

Application deficiencies found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not
present
for scanning. (Document title)

X Scanned copy is best available. Some drawings are dark